


## 2.0 Megapixel WDR, Starlight Full Spectrum, AF, IR Bullet Network Camera

### Key Features

- ❖ Starlight Illumination
- ❖ 4X Optical Zoom & Auto Focus
- ❖ Up to 120 dB WDR (Wide Dynamic Range)
- ❖ Full Spectrum Light with both White and Infrared LED Design
- ❖ White Light Open while PIR alarm Received to Express alarm and Ensure Colorful Surveillance
- ❖ Smart IR, up to up to 50m (164ft) IR Distance
- ❖ White Light, Up to 10m (33ft)
- ❖ Optical Glass Window with Higher Light Transmittance
- ❖ IR Anti-Reflection Window to Increase the Infrared Transmittance
- ❖ Day/Night Functionality
- ❖ H.265, H.264, MJPEG
- ❖ Triple Streams
- ❖ ROI (Region of Interest)
- ❖ 9:16 Corridor Mode
- ❖ Wide Temperature Range: -40°C to 60°C (-40°F to 140°F)
- ❖ Customized OSD
- ❖ ONVIF Conformance
- ❖ Support PoE Power Supply
- ❖ Wide Voltage Range of ±25%
- ❖ IP67



### Dimensions

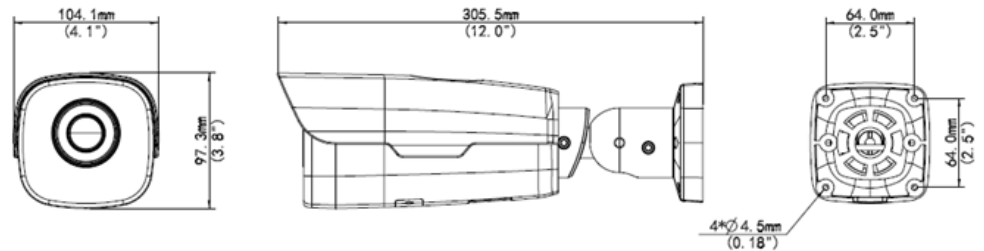

### Technical Specification

Model	SCL-OBL02MVIR-SL26UDZ
Product Name	2.0 Megapixel WDR, Starlight Full Spectrum, AF, IR Bullet Network Camera
Camera	
Sensor	1/2.8", 2.0 Megapixel, Progressive Scan CMOS
Shutter	Auto/Manual, 1/6~1/8000s
Lens	2.8~12mm@F1.6, DC-Iris
Angle of View (H)	97° (wide) ~ 35° (Tele)
Zoom/Focus	4X Optical Zoom / Auto Focus
Min. Illumination	Colour: 0.002 Lux (F1.6, AGC ON) 0 Lux with IR
Day/Night	IR-Cut Filter with auto Switch (ICR)
S/N	>52dB
WDR	120dB
IR	Smart-IR, up to 50m (164ft) IR Range
White Light	Up to 10m (33ft) with PIR Alarm

<b>Video</b>	
Max. Resolution	1920 × 1080
Video Compression	H.265, H.264, MJPEG
Frame Rate	1080P (1920*1080): Max. 30 fps
9:16 Corridor Mode	Supported
ROI	Supported
Video Streaming Available	Triple
OSD	Up to 8 OSDs
Privacy Mask	Up to 4 areas
<b>Audio</b>	
Audio Compression	G.711
Two-Way Audio	Supported
<b>Storage</b>	
Edge Storage	Micro SD, Up to 128 GB
<b>Network</b>	
Protocols	L2TP, IPv4, IGMP, ICMP, ARP, TCP, UDP, DHCP, PPPoE, RTP, RTSP, DNS, DDNS, NTP, FTP, UPnP, HTTP, HTTPS, SMTP, SNMP, SIP, QoS
Security	User Access Log, Password Protection, HTTPS Encryption, RTSP Authentication, ARP Binding, IP Address Filtering, Video Watermark, IEEE 802.1x
Compatible Integration	ONVIF, API
<b>Interface</b>	
Audio I/O	Audio cable 1 Input: impedance 35 kΩ; amplitude 2 V [p-p] 1 Output: impedance 600 Ω; amplitude 2 V [p-p]
Alarm I/O	2 / 1
Network	10M/100M Base-TX Ethernet
Video Output	1 BNC, impedance 75 Ω; amplitude 1 V [p-p]
Serial	1 RS485
<b>General</b>	
Power	DC12V ± 25%, AC24V ± 25% or PoE (IEEE802.3 at) Power consumption: 13.7W
Material	Cast aluminum
Dimensions (L × W × H)	305.5 × 104.1 × 97.3mm (12.0" × 4.1" × 3.8" )
Weight	1.65 kg (3.6 lb)
Working Environment	-40° C ~ +60° C (-40° F ~ 140° F), Humidity ≤ 95% RH (Non-Condensing)
Ingress Protection	IP67