


Key Features

- ❖ Day/Night Functionality
- ❖ Smart IR Technology
- ❖ 3D DNR (Digital Noise Reduction)
- ❖ Triple Streams
- ❖ ROI (Region of Interest)
- ❖ 9:16 Corridor Mode
- ❖ Customized OSD
- ❖ ONVIF Conformance
- ❖ Support PoE Power Supply
- ❖ Wide Temperature Range: -35° C to 60° C (-31° F to 140° F)
- ❖ Wide Voltage Range of ±25%
- ❖ IP66



Dimensions

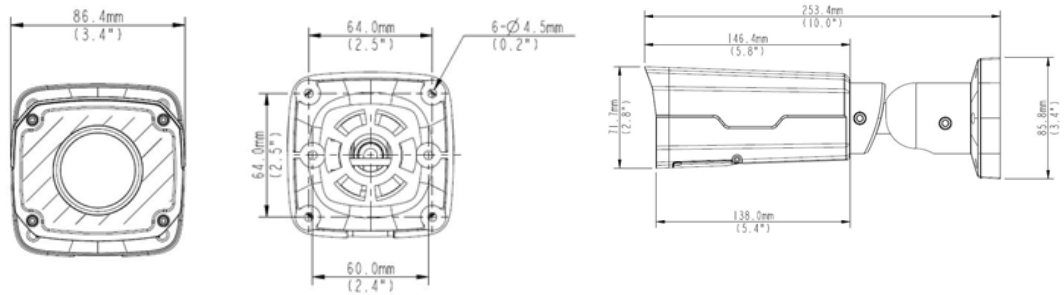

Technical Specification

Model	SCP-OBL02VFIR-66LN
Product Name	2.0 Megapixel Varifocal, Water-Proof, IR Bullet Network Camera
Camera	
Sensor	1/2.8", 2.0 Megapixel, Progressive Scan CMOS
Shutter	Auto/Manual, 1/6~1/8000s
Lens	2.8~12 mm@F1.4; Angle of view: 90° ~ 28°
Zoom/Focus	Manual
Min. Illumination	Colour: 0.06 Lux (F1.4, 50IRE) Black & White: 0.03Lux (F1.4, 50IRE)
Day/Night	IR-cut filter with auto switch (ICR)
S/N	>52dB

Securicorp Technologies UK Ltd, All Rights Reserved. This document is for planning purposes only and is not intended to modify or supplement any specifications or warranties relating to product. Securicorp Technologies UK Ltd may make changes to specifications and descriptions with out notice.

Video	
Max. Resolution	1920 × 1080
Video Compression	H.264,MJPEG
Frame Rate	1080P (1920×1080): Max. 30 fps; 720P (1280×720): Max. 30 fps; D1 (720×576): Max. 25 fps
9:16 Corridor Mode	Supported
ROI	Supported
Video Streaming Available	Triple
OSD	Up to 8 OSDs
Privacy Mask	Up to 4 areas
Audio	
Audio Compression	N/A
Two-way audio	N/A
Storage	
Edge Storage	Micro SD, up to 128 GB
Network	
Protocols	L2TP, Ipv4, IGMP, ICMP, ARP, TCP, UDP, DHCP, PPPoE, RTP, RTSP, Qos, NTP, FTP, HTTP, SNMP, SIP
Security	User Access Log, Password Protection, HTTPS Encryption, RTSP Authentication, ARP Binding, IP Address Filtering, Video Watermark, IEEE 802.1x
Compatible Integration	ONVIF, API
Interface	
Audio I/O	N/A
Alarm I/O	N/A
Network	10M/100M Base-TX Ethernet
General	
Power	12 V DC, or PoE (IEEE802.3 af) Power consumption: Max 8W
Material	Cast Aluminum
Dimensions (L × W × H)	253.4 × 86 × 71.7 mm (9.98" × 3.4" × 2.8")
Weight	0.58kg (1.28lb)
Working Environment	-35° C ~ +60° C (-31° F ~ 140° F), Humidity ≤ 95% RH (non-condensing)
Ingress Protection	IP66

Securicorp Technologies UK Ltd, All Rights Reserved. This document is for planning purposes only and is not intended to modify or supplement any specifications or warranties relating to product. Securicorp Technologies UK Ltd may make changes to specifications and descriptions with out notice.