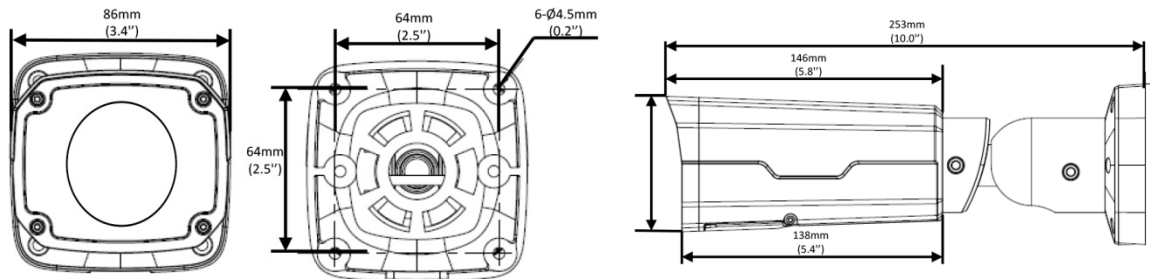# SECURICORP®
EXPERIENCE. EXPERTISE. EXECUTION

Key Features

- ❖ Starlight Illumination
- ❖ Ultra 265,H.265, H.264, MJPEG
- ❖ 2D/3D Digital Noise Reduction
- ❖ Up to 120 dB Optical Wide Dynamic Range
- ❖ Triple streams supported
- ❖ IP67 rating
- ❖ 60 fps frame rate

Technical Specifications

Model	SCM-OBL02MVIR-SL22HDZ
Product Name	2.0 Megapixel WDR, Motorized, IR Bullet Network Camera
Camera	
Image Sensor	1/2.8" 2MP progressive scan CMOS
Lens	2.7~13.5mm, AF automatic focusing and motorized zoom lens
Angle of View	H: 121.36°~33.51, V: 58.4°~14.9°, O: 139.9°~33.4°
Electronic Shutter	Auto/Manual
Mini. Illumination	0.001 Lux@F1.2 (Color) , 0Lux IR On
WDR	120dB
Digital noise reduction	2D/3D
Video	
Video Compression	Ultra 265/H.265/H.264/MJPEG
Frame Rate	First Stream: 2MP (1920×1080): Max. 60fps;
	Second Stream: 720P (1280×720): Max. 30 fps;
	Third Stream: D1 (720×576): Max. 30fps;
Intelligent Function	Defocus, Scene Change, Object Left, Object Moving, Face detection, People counting

IR Led	
IR Distance	Up to 50m
Network	
Network Protocol	IPv4, IGMP, ICMP, ARP, TCP, UDP, DHCP, PPPoE, RTP, RTSP, RTCP, DNS, DDNS, NTP, FTP, UPnP, HTTP, HTTPS, SMTP, 802.1x, SNMP
ONVIF	Supported (Profile S, Profile G)
Audio	
Compression	G.711
Sampling Rate	8 KHZ
Interface	
Video Out	1 BNC, impedance : 75 Ω
Audio	Input: impedance 35 kΩ, Output: impedance 600 Ω
Alarm I/O	1/1
RJ45	1 10M/100M Base-TX Ethernet
Micro SD	Up to 128 GB
Environmental	
Power Consumption	<10W
Power Supply	12 V DC±25%, PoE (IEEE802.3 af)
Vandal Resistant	IK10
Weather proof rating	IP67
Working Environment	-35°C ~ +60°C (-31°F ~ 140°F)
Dimensions	253.4 ×86×71.7 mm
Weight	1.0 kg