


Key Features

- ❖ H.265 & H.264 dual-stream encoding
- ❖ DWDR, Day/Night(ICR), 3DNR, AWB, AGC, BLC
- ❖ 2.8mm fixed lens
- ❖ Max IR LEDs length 30m
- ❖ IP67 rating
- ❖ IK10 vandal resistant



Technical Specifications

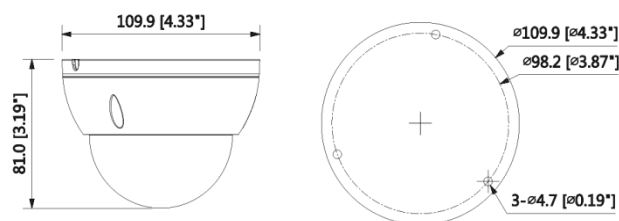

Model	SCP-VDM02FFIR-WD82FP-D
Product Name	2.0 Megapixel DWDR, IR Fixed Lens Dome Camera
Camera	
Image Sensor	1/2.7" 2MP progressive scan CMOS
Lens	2.8 mm @F2.0
Angle of View	H: 104°/92°, V: 55°/50°
Electronic Shutter	Auto/Manual, 1/3~1/100000s
Mini. Illumination	0.08Lux/F2.0(Color,1/3s,30IRE) 0.3Lux/F2.0(Color,1/30s,30IRE) 0Lux/F2.0(IR on)
Effective Pixels	1920(H)x1080(V)
IR Distance	Up to 30m
S/N	>50dB
Video	
Video Compression	H.265/H.264H/MJPEG(Sub Stream)
Smart Codec	H.265+/H.264+ supported
Frame Rate	First Stream: 1080P(1 ~ 25/30fps)
	Second Stream: D1(1 ~ 25/30fps)

Securicorp Technologies UK Ltd. All Rights Reserved. This document is for planning purposes only and is not intended to modify or supplement any specifications or warranties related to the product. Securicorp Technologies UK Ltd. may make changes to specifications or descriptions without notice.

Network	
Protocol	HTTP;HTTPS;TCP;ARP;RTSP;RTP;RTCP;UDP;SMTP;FTP;DHCP;DNS;DDNS;PPPoE; IPv4/v6;QoS;UPnP; NTP;Bonjour;IEEE 802.1x;Multicast;ICMP;IGMP;TLS
ONVIF	Supported (Profile S, Profile G)
RJ-45	10/100Base-T
Max User Access	10/20
Environmental	
Power Consumption	<5.5W
Power Supply	12 V DC, PoE (802.3 af)(Class 0)
Vandal Resistant	IK10
Weather proof rating	IP67
Working Environment	-30°C ~ +60°C, <95% RH
Dimensions	Φ109.9mm × 81mm
Weight	0.47 kg

Securicorp Technologies UK Ltd. All Rights Reserved. This document is for planning purposes only and is not intended to modify or supplement any specifications or warranties related to the product. Securicorp Technologies UK Ltd. may make changes to specifications or descriptions without notice.