


Key Features

- ❖ Ultra 265, H.265, H.264, MPEG compression
- ❖ IP67 rating
- ❖ 2D/3D DNR
- ❖ Smart IR, up to 30m
- ❖ ONVIF Conformance
- ❖ Day/night functionality



Technical Specifications

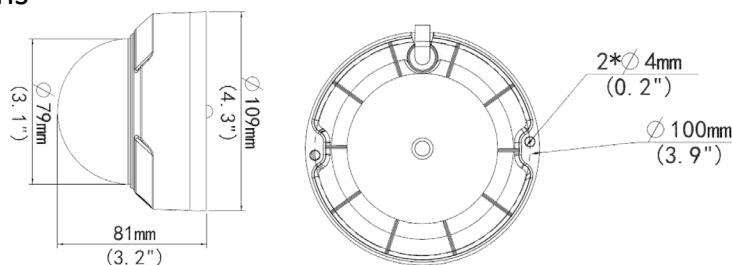

Model	SCP-VDM04FFIR-FS34D
Product Name	4.0 Megapixel, Vandal resistant Fixed IR Dome Network Camera
Camera	
Image Sensor	1/3", 4.0 MP progressive scan CMOS
Lens	2.8 mm @F2.0
Angle of View	H: 104.4°, V: 54.4°, O: 135.7°
Electronic Shutter	Auto/Manual, 1~1/100000s
Mini. Illumination	0.03Lux/F2.0(Color,AGC on) 0Lux (IR on)
Adjustment Angle	Pan: 0° ~ 360° Tilt: 0° ~ 75°
IR Distance	Up to 30m
DNR	2D/3D
S/N	>52dB
WDR	DWDR
Video	
Video Compression	Ultra 265, H.265, H.264, MJPEG
Frame Rate	First Stream: 4MP (2592*1520): Max. 20 fps;
	Second Stream: 720P (1280*720): Max. 20 fps;
	Third Stream: D1 (720*576): Max. 20 fps
OSD	Up to 4 OSDs

Securicorp Technologies UK Ltd. All Rights Reserved. This document is for planning purposes only and is not intended to modify or supplement any specifications or warranties related to the product. Securicorp Technologies UK Ltd. may make changes to specifications or descriptions without notice.

Privacy Mask	Up to 8 areas
ROI	Up to 2 areas
Motion Detection	Up to 4 areas
BLC	Supported
HLC	Supported
Smart	
Behavior Detection	Intrusion, Motion, Tampering alarm
Network	
Protocol	IPv4, IGMP, ICMP, ARP, TCP, UDP, DHCP, RTP, RTSP, RTCP, DNS, DDNS, NTP, FTP, UPnP, HTTP, HTTPS, SMTP, SSL, QoS
ONVIF	Supported (Profile S, Profile T)
Interface	1 RJ45 100M Base-TX Ethernet
General	
Power Consumption	<4W
Power Supply	DC 12V±25%, PoE (IEEE 802.3af)
Ingress Protection	IP67
Vandal Resistant	IK10
Working Environment	-30°C ~ 60°C
Dimensions	Φ109 x 81mm
Weight	0.45 kg

Securicorp Technologies UK Ltd. All Rights Reserved. This document is for planning purposes only and is not intended to modify or supplement any specifications or warranties related to the product. Securicorp Technologies UK Ltd. may make changes to specifications or descriptions without notice.