




Securicorp SGSM-1000SMS GPRS/3G Gate Opener

The SGSM-1000SMS is a very simple device which can be used for remote control swing or sliding gates and doors or switching devices with authorized access management (Caller-ID), well used on door access, gate control, remote switching, or car parking systems. Actually the SGSM-1000SMS can be used in places which require to turn ON/OFF your system, machines, equipment's remotely with a FREE phone call from your mobile or fixed line telephone.

PC software for programming via USB, remote server system over TCP/IP supported*, users can easily download the access historical data anywhere anytime.

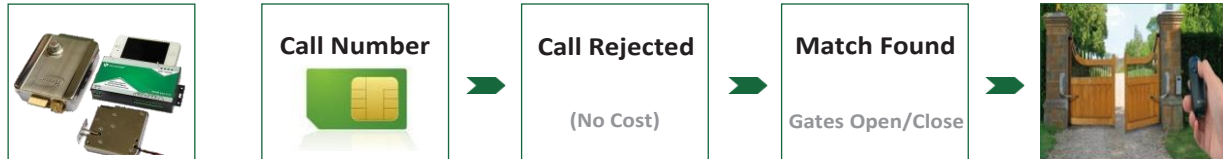

Advantages

- ❖ GSM or 3G band, distribute worldwide applications;
- ❖ Up to 999 authorized phone numbers can be configured at the specified time for access control;
- ❖ No call charges. Reject calls from authorized number then carries out the turn ON/OFF action on the first 'ring';
- ❖ Secure — Using Caller-ID for verification, unknown phone calls are ignored;
- ❖ SMS confirmation of relay actions (door open) to the owner or authorized caller number.
- ❖ No need remote control or keys for different users;
- ❖ Multiple applications. (gates, bollards, barriers, garage doors, shutters and access doors or machines);

Digital Inputs

- ❖ One Digital input for motion sensor or other sensors to protect your door and windows, SMS alert to owner immediately when triggered;
- ❖ One Digital input special for secure door and automatically armed when door closed, SMS alert to owner immediately when door opened illegally.

Setting

- ❖ SMS command or PC Software programming;
- ❖ Operate from anywhere anytime, no distance limitation;

SPECIFICATIONS

GSM Frequency	Quad-band 850/900/1800/1900MHz
3G Band	900/2100MHz default 850/1900MHz optional*
Digital Input	2 NC/NO dry contact
Digital Output	1 Relay, 3A/240VAC
Siren Output	12VDC/1A
DC Power supply	9~24VDC/2A
Power consumption	12V input Max. 50mA/Average 50mA
SIM Card	Supporting 3V SIM Card
Antenna	50 Ω SMA Antenna interface
Temperature range	-20~ +60 °C
Humidity range	Relative humidity 90%
Backup battery	3.7V/900MAH
Exterior dimension	W151mm*D74mm*H27mm
Net Weight	260 g



Securicorp Technologies UK Ltd, All Rights Reserved. This document is for planning purposes only and is not intended to modify or supplement any specifications or warranties relating to product. Securicorp Technologies UK Ltd may make changes to specifications and descriptions without notice.