


### Key Features:

- ❖ IP67 rating
- ❖ Smart IR up to 200m
- ❖ ONVIF conformance
- ❖ Auto day/night functionality
- ❖ Up to 120dB Optical Wide Dynamic Range
- ❖ Ultra 265, H.265, H.264, MPEG Compression
- ❖ 1/1.8" 2.0 Megapixel progressive scan CMOS
- ❖ Optical glass window with higher light transmittance
- ❖ IR anti-reflection window to increase the infrared transmittance



### Dimensions:

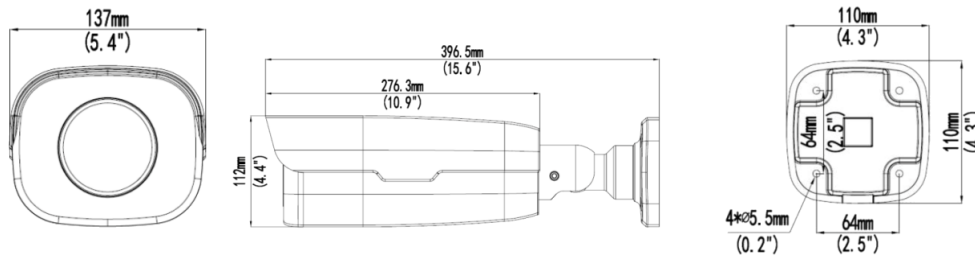

### Technical Specifications

Model	SCL-OBL02MVIR-SL25UD22X
Product Name	2.0 Megapixel Starlight, WDR IR Network Bullet Camera
<b>Camera</b>	
Image Sensor	1/1.8" 2Megapixel progressive scan CMOS
Lens	6.5 ~ 143mm
Shutter	Auto/Manual, 1~1/100000s
Mini. Illumination	0.0005Lux (F1.5. AGC ON) 0Lux (IR on)
Signal Noise Ratio	> 52dB
IR Distance	Up to 200m
Digital Noise Reduction	2D/3D DNR
WDR	120dB
Angle of View	H: 34.6°~1.6°
	V: 34.6°~ 1.6°
	O: 72.6°~ 3.6°
<b>Audio</b>	
Audio Compression	G.711
Two-way audio	Supported

<b>Storage</b>	
Edge Storage	Micro SD, up to 256 GB
Network Storage	ANR
<b>Video</b>	
Video Compression	Ultra 265, H.265, H.264, MJPEG
H.264 code profile	Baseline, Main, High Profiles
Frame Rate	First Stream: 2MP (1920*1080), Max 60fps;
	Second Frame: 2MP (1920*1080), Max 60fps;
	Third Frame: D1 (720*576), Max 60fps
On screen display	Upto 8 OSDs
BLC	Supported
Motion Detection	Upto 4 areas
ROI	Supported
Privacy Mask	Upto 8 areas
HLC	Supported
<b>Smart</b>	
Event Trigger	Motion detection, Intrusion, cross line,
Recognition	Face detection, Audio detection
Intelligent Identification	Defocus, Scene Change, Object Left, Object Moving
Statistical Analysis	People counting
General	Watermark, IP Address Filtering, Tampering Alarm, Alarm input, Alarm output, Access Policy, ARP Protection, RTSP Authentication, User Authentication
<b>Network</b>	
Protocol	IPv4, IGMP, ICMP, ARP, TCP, UDP, DHCP, PPPoE, RTP, RTSP, RTCP, DNS, DDNS, NTP, FTP, UPnP, HTTP, HTTPS, SMTP, 802.1x, SNMP, QoS
ONVIF	Supported (Profile S, Profile G, Profile T), API
<b>Interface</b>	
Video	1 BNC
Audio I/O	1/1 channel
RS485	1 port
Alarm I/O	2/1
Network	1 RJ45 10M/100M Base-TX Ethernet
<b>Environmental</b>	
Power Supply	AC 24V±25%, -P: PoE (IEEE 802.3at)
Power consumption	< 21W
Working Environment	-40° C ~ +60°, < 95% RH
Ingress Protection	IP67
Dimensions	396.5 × 137 × 112mm
Weight	3.7kg