


## Key Features

- ❖ Ultra 265, H.265, H.264, MPEG compression
- ❖ IP67 rating
- ❖ 2D/3D DNR
- ❖ Smart IR, up to 30m
- ❖ ONVIF Conformance
- ❖ Day/night functionality



## Technical Specifications

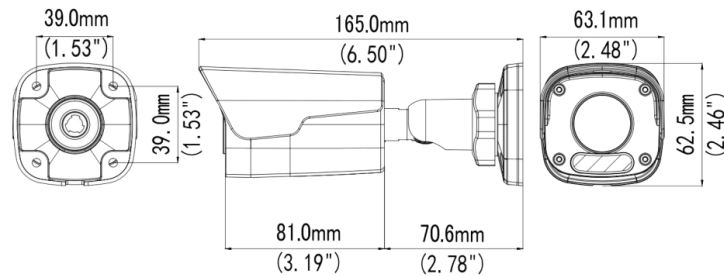

Model	SCP-OBL04FFIR-FP12D
Product Name	4.0 Megapixel, Mini Fixed Bullet Network Camera
<b>Camera</b>	
Image Sensor	1/3", 4.0 MP progressive scan CMOS
Lens	2.8 mm @ F2.0
Angle of View	H: 104.4°, V: 54.4°, O: 135.7°
Electronic Shutter	Auto/Manual, 1~1/100000s
Mini. Illumination	0.03Lux/F2.0( Color,AGC on) 0Lux (IR on)
Adjustment Angle	Pan: 0° ~ 360° Tilt: 0° ~ 90° Rotate: 0° ~ 360°
IR Distance	Up to 30m
S/N	>52dB
DNR	2D/3D
WDR	DWDR
<b>Video</b>	
Video Compression	Ultra 265, H.265, H.264, MJPEG
Frame Rate	First Stream: 4MP (2592*1520): Max. 20 fps;
	Second Stream: 720P (1280*720): Max. 20 fps;
	Third Stream: D1 (720*576): Max. 20 fps
OSD	Up to 4 OSDs

Securicorp Technologies UK Ltd. All Rights Reserved. This document is for planning purposes only and is not intended to modify or supplement any specifications or warranties related to the product. Securicorp Technologies UK Ltd. may make changes to specifications or descriptions without notice.

Privacy Mask	Up to 8 areas
ROI	Up to 2 areas
Motion Detection	Up to 4 areas
HLC	Supported
BLC	Supported
<b>Network</b>	
Protocol	IPv4, IGMP, ICMP, ARP, TCP, UDP, DHCP, RTP, RTSP, RTCP, DNS, DDNS, NTP, FTP, UPnP, HTTP, HTTPS, SMTP, SSL, QoS
ONVIF	Supported (Profile S, Profile T)
Interface	10/100M Base-TX Ethernet
<b>General</b>	
Power Consumption	<6.4W
Power Supply	DC 12V±25%, PoE (IEEE 802.3af)
Weather proof rating	IP67
Reset Button	Supported
Working Environment	-30°C ~ 60°C (-22°F ~ 140°F)
Dimensions	165 × 63.1 × 62.5mm
Weight	0.45 kg

Securicorp Technologies UK Ltd. All Rights Reserved. This document is for planning purposes only and is not intended to modify or supplement any specifications or warranties related to the product. Securicorp Technologies UK Ltd. may make changes to specifications or descriptions without notice.