

Network Video Recorder for Temperature Screening




Key Features:

- ❖ ONVIF conformance
- ❖ Supports up to 16 channel
- ❖ Instant playback, accurate retrieval
- ❖ HDMI and VGA simultaneous output
- ❖ Supports up to 12MP Resolution Recording
- ❖ Ultra265/H.265/ H.264 video formats supported
- ❖ 2 SATA HDD Support, up to 10TB capacity for each HDD
- ❖ Support 4-ch face recognition with face capture camera
- ❖ Support 1-ch face recognition with non-face-capture camera



SCG-BTM-NVR6500

Dimensions:

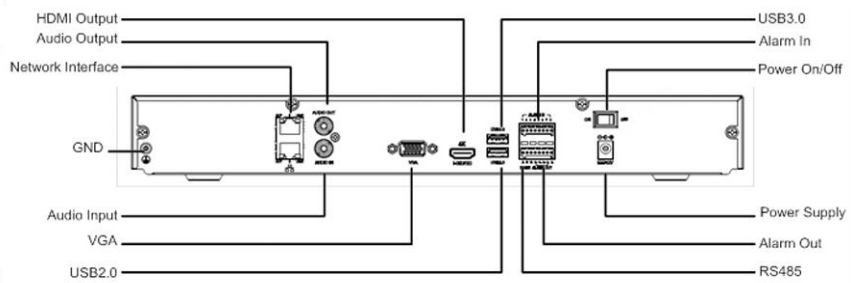

Technical Specifications

Model	SCG-BTM-NVR6500
Product Name	Network Video Recorder for Temperature Screening
Video/Audio Input	
IP Video Input	16-ch
Two-way Audio Input	1-ch, RCA
Network	
Incoming Bandwidth	160Mbps
Outgoing Bandwidth	320Mbps
Remote Users	128
Protocols	P2P, UPnP, NTP, DHCP, PPPoE

Network Video Recorder for Temperature Screening

SCG-BTM-NVR6500

Video/Audio Output	
HDMI/VGA Output	VGA: 1920x1080p/60Hz, 1920x1080p/50Hz, 1600x1200/60Hz, 1280x1024/60Hz, 1280x720/60Hz, 1024x768/60Hz
	HDMI:4K (3840x2160)/60Hz, 4K (3840x2160)/30Hz, 1920x1080p/60Hz, 1920x1080p/50Hz, 1600x1200/60Hz,1280x1024/60Hz, 1280x720/60Hz, 1024x768/60Hz
Recording Resolution	12MP/8MP/6MP/5MP/4MP/3MP/1080p/960p/720p/D1/2CIF/CIF
Audio Output	1-ch, RCA
Synchronous Playback	16-ch
Corridor Mode Screen	3/4/5/7/9/10/12/16
Decoding	
Format	Ultra 265, H.265, H.264
Live view/Playback	12MP/8MP/6MP/5MP/4MP/3MP/1080p/960p/720p/D1/2CIF/CIF
Capability	3 x 12MP@25, 4 x 4K@30, 8 x 4MP@30, 16 x 1080P@30, 32 x 960P@25, 36 x 720P@30, 64 x D1
Hard Disk	
SATA	2 interfaces
Capacity	up to 10TB for each HDD
External Interface	
Network Interface	2 RJ45 10M/100M/1000M
Serial Interface	1 x RS485
USB Interface	Rear panel: 1 x USB3.0, 1 x USB2.0
Alarm In	8-ch
Alarm Out	2-ch
Smart	
VCA Search	Face search, Behavior search
VCA Detection	Face detection, Intrusion detection, Cross line detection, Audio detection, Defocus detection, Scene change detection, Auto tracking
Statistical Analysis	People counting
Face recognition	4-ch (with face capture camera)
	1-ch (with normal camera)
Face library capacity	Up to 16 face libraries
	Total capacity of 50000 face images
General	
Power Supply	12V DC
Power Consumption	≤ 7.5W(without HDD)
Working Environment	-10°C ~ + 55°C (+14°F ~ +131°F), Humidity ≤ 90% RH
Dimensions(W×D×H)	380mm ×315mm× 53mm
Weight (without HDD)	≤ 2 kg